

Reclaimed Barn Wood Planks




Capture the weathered beauty of time-worn barns and other antiqued structures Made in the USA with the newly updated offering of **Reclaimed Barn Wood Planks**. These planks are available as a blend of mixed species and provide a piece of history, reimagined with authentic Americana color stains or in original patina for endless vintage design possibilities.



Rustic White - WPCLB024



Weathered Nickel - WPCLB025

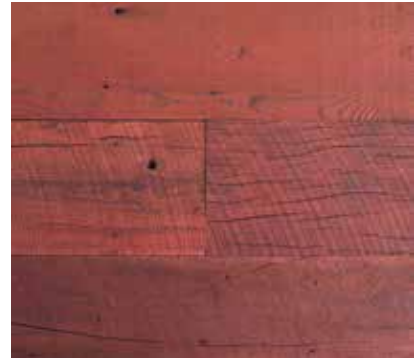

Wirebrushed Red - WPCLB026



Natural Patina - WPCLB023



Milled Silver* - WPCLB027

*Fabricated White Pine



Hampton Designer Showhouse, Water Mill, NY

Dyfar Interiors

Featuring Reclaimed Barn Wood Planks - Weathered Nickel - WPCLB025

View collection web page for the complete offering including additional product options, corresponding Spec ID# and updates.

SPECIFICATIONS

SIZE: 4 1/2" - 10 1/2" Random widths; 4' - 12' Random lengths

THICKNESS: 5/8" nominal

FINISH: WPCLB024-WPCLB026: Unfinished with color wash; WPCLB023: Unfinished; WPCLB027*: Prefinished

SPECIES: Mixed species

- Made in the USA
- Can contribute to LEED®
- Please note that variations in color and texture may occur due to the nature of the material

INSTALLATION METHOD

QUALITY ASSURANCE

- Installer/Builder Qualifications: An experienced installer/builder who has completed interior and exterior projects similar in material, design and extent indicated for the project, whose work has resulted in interior and exterior installations of similar products with a record of successful inservice performance.
- Customer Installation Qualifications: Leave yourself ample time to adequately plan each step of your project. Proper planning and correct knowledge will yield the best results possible. If you encounter an issue regarding the installation, always consult with an installation professional.
- Installation Qualifications: Installation will require either architectural plans or on-site planning to determine the actual method(s) of installation to meet local building codes. Such planning and details of all projects are the responsibility of the customer or customers' agent.
- Complexity of Projects: Complexity of projects will vary greatly. Consult a professional installer for more information.

STORAGE AND HANDLING

- Do not install wood products until they have had adequate time to adjust to the relative humidity of the new environment (within 2-1/2% Moisture Content).
- Protect wood products from exposure to moisture and like conditions. Do not deliver wood products until after concrete, masonry, plaster, ceramic tile and similar wet work is completely cured and dried.
- Store wood products in a dry, warm, well-ventilated, weather-tight location.
- Move wood products into spaces where they will be installed at least seven to ten days before installation.

PROJECT CONDITIONS

- Conditioning: Maintain an ambient temperature between 65- and 75-degrees Fahrenheit in spaces to receive wood products for at least seven days before installation, during installation, and for at least seven days after installation. After post-installation period, maintain relative humidity and ambient temperature planned for building occupants.
- Do not install wood products until it has adjusted to the relative humidity and temperature of the space where it is to be installed.
- Moisture contents between flooring/paneling and subflooring should vary no more than 2-1/2% of one another before installation.

RECOMMENDED TOOLS & APPLICABLE MATH:

- Saws (for fitting & trimming)
- Table saw
- Compound Miter Saw
- Jig Saw
- Circular Saw
- Framing to apply boards to
- Air Supply
- Fasteners
- Finish Nails (with a nail gun) recommended: 16 gauge or heavier, 2" or longer
- Finishes (optional)
- MATH: Barn Siding is measured in square feet. This is the amount of lumber required to cover one square foot of area without any consideration for the thickness of the wood.
- [Square Feet = width x length of surface]
- Example: A 17' x 19'6" surface is 331½ square feet (17'x19.5')
- Surfaces include walls, ceiling coverings and floors
- Please refer to the Workshop Math Guide for more information regarding applicable workshop math.

SURFACE/SITE PREPARATION:

- It is very important to have strong, evenly spaced 2x4 or 2x6 supports covered with minimum 5/8 inch thickness plywood sheathing for the barn siding to be secured to.

FINISHING:

- Always follow the manufacturers recommended installation instructions for all products used
- Always experiment with finishes on a cut-off or on a section that will not be seen (all woods take various products differently).
- No finish is required (unless desired).
- Never use coarse grit sandpaper on rustic grade antique wood surfaces. Due to the thin patina achieved on rustic grade wood, drum sanders are not recommended. If needed, lightly sand rustic surfaces with 220 grit or finer sandpaper on an orbital sander.

MAINTENANCE

Never use a scrubbing or scouring pad that may damage or scratch any surface. Use only those cleaning products and pads that are recommended by the product manufacturer or that are deemed wood safe.

WARRANTY

All Products are sold “AS IS” and Architectural Systems’ sale warranties are solely that it is the owner of the Products sold Buyer and that the Products are delivered free from any security interest or other lien or encumbrance whatsoever.

TECHNICAL DATA

Please contact sales@archsystems.com